

# 44-1500 Series

## Regulators - Pressure Reducing

D44151937X012

### Specifications

For other materials or modifications, please consult TESCOM.

#### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

**Maximum Inlet Pressure**

6000 psig / 414 bar

**Outlet Pressure Ranges**

**Spring Loaded:** 0-200, 0-400 psig / 0-14, 0-28 bar

**Air/Dome Loaded:** 0-600 psig / 0-41 bar

**Design Proof Pressure**

150% maximum pressure

**Leakage**

Bubble-tight

**Ambient Operating Temperature**

-15°F to 165°F / -26°C to 74°C

**Flow Capacity**

$C_v = 0.3$

**Maximum Operating Torque**

25 in-lbs / 2.8 N•m

**Decaying Inlet Characteristic**

0.1 per 100 psig / 0.007 per 6.9 bar



#### MEDIA CONTACT MATERIALS

**Body**

316 Stainless Steel or Brass

**40 Micron Filter**

Bronze

**Main Valve Seat**

Vespel® SP21

**Vent Valve Seat**

Vespel® SP21

**O-Ring**

Buna-N, Viton®, Kalrez®, E.P.

**Back-up Rings**

Teflon®

**Remaining Parts**

300 Series Stainless Steel, Brass, Monel

#### OTHER

**Cleaning**

CGA 4.1 and ASTM G93

**Weight**

4.75 lbs / 2.2 kg

*Teflon®, Viton®, Vespel®, and Kalrez® are registered trademarks of E.I du Pont de Nemours and Company.*

TESCOM 44-1500 Series high flow/low pressure regulator controls outlet pressures up to 600 psig / 41 bar. Large area piston provides accurate pressure control and cycle life superior to diaphragm sensed regulators when applied to heavy duty cycling. Features a segregated/captured vent for hydraulic or pneumatic media and is available in two outlet spring ranges. Optional dome or air loaded versions for remote operation or for use with the TESCOM ER5000 Electropneumatic Controller for automation.







### Applications

- Hydraulic testing
- Pneumatic testing

### Features and Benefits

- For gaseous and liquid media
- “Segregated and Captured” vent design is standard
- Balanced valve design ensures stable downstream pressure
- 6000 psig / 414 bar maximum inlet
- Low droop
- Large sensor for accurate pressure control
- High flow, low outlet pressures
- Compatible with TESCOM ER5000 Electropneumatic Controller



44-1500 Series Regulator Drawings

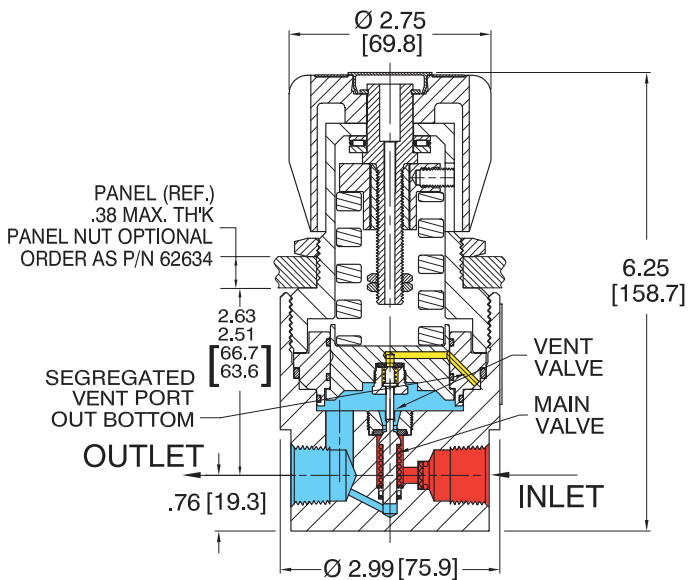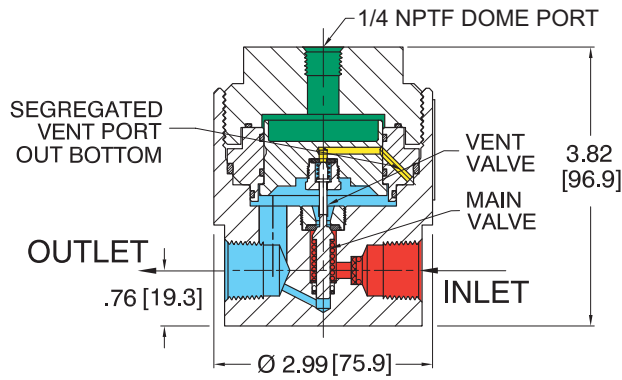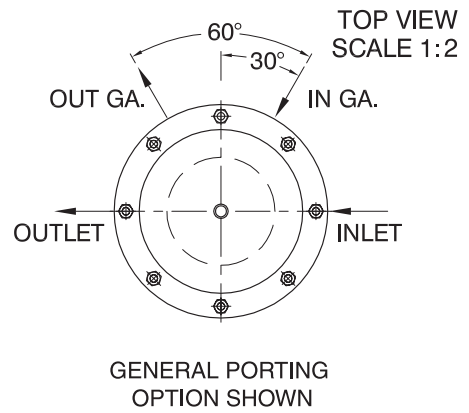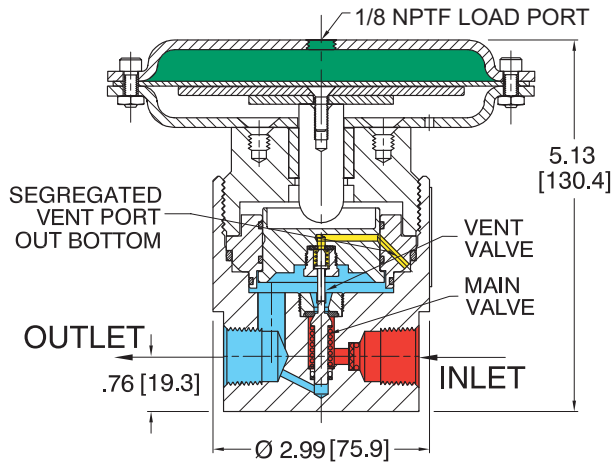

All dimensions are reference & nominal  
Metric [millimeter] equivalents are in brackets

### 44-1500 Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on [www.tescom.com](http://www.tescom.com).

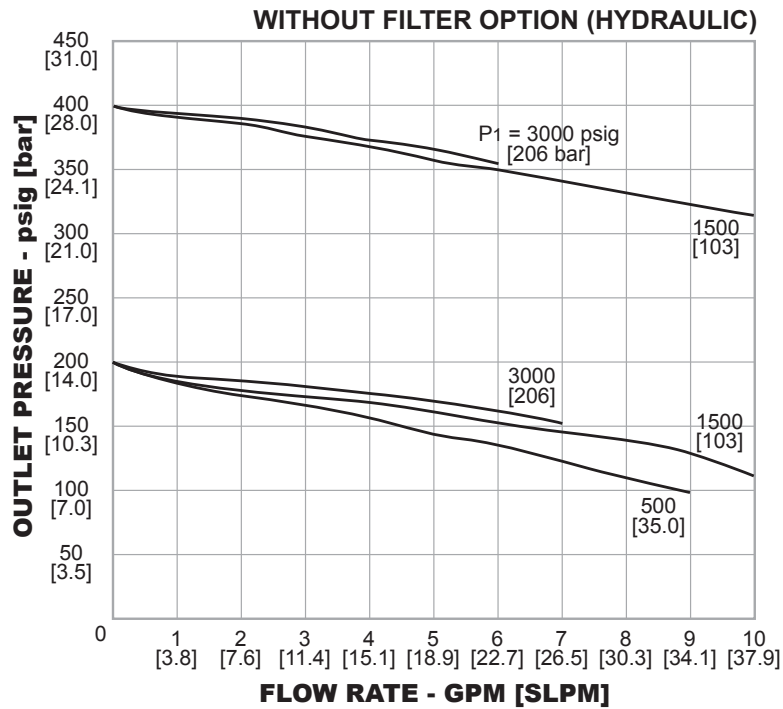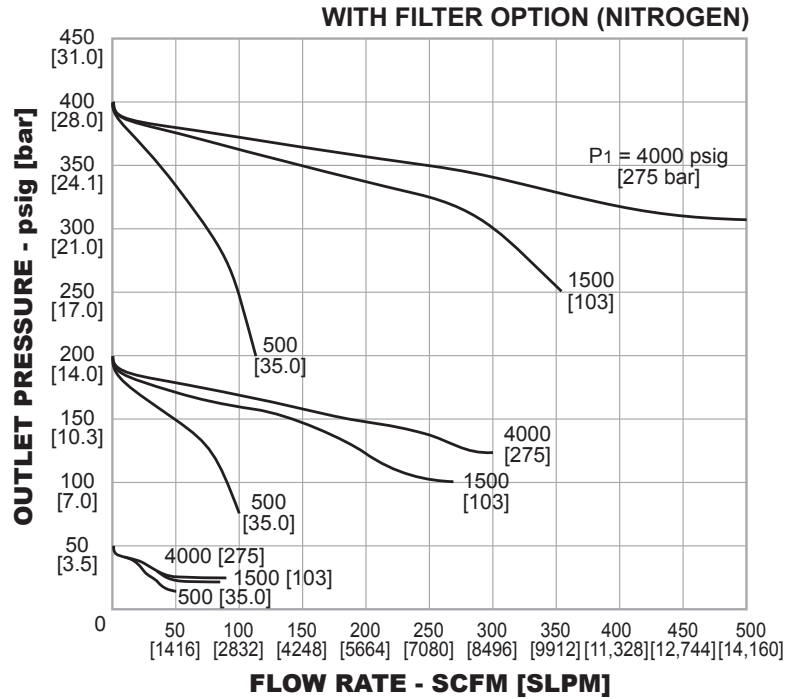

## 44-1500 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

BASIC SERIES	BODY MATERIAL	MATERIALS CONTACTING LINE MEDIA	OUTLET PRESSURE	SOFT GOODS MATERIAL			INLET AND OUTLET PORT TYPE	VENT PORT	INLET AND OUTLET PORT SIZE	FILTER OPTION	MAIN VALVE AND VENT SEAT MATERIAL	GAUGE PORT OPTIONS 1/4" NPTF
				O-RING		BACKUP RING						
				DYNAMIC	STATIC							
44-15	1	4	D	2	8	S	2	7	2			
				D – Buna-N T – Viton® V – Kalrez® Z – E.P.	Buna-N Viton® Kalrez® E.P.	Teflon® Teflon® Teflon® Teflon®	1 – SAE 1/4" SAE 2 – NPTF 1/4" NPTF 3 – MS33649 1/4" MS33649		6 – 3/8" 8 – 1/2"	2 – WITH Filter* 3 – NO Filter	7 – Vespel® SP21 8 – PEEK	0 – None 1 – One Outlet Gauge at 90° 2 – Two Gauge Ports at 90° 3 – Two Gauge Ports at 60° (left hand inlet) 4 – One Outlet Ports at 90° (left hand inlet)

A – Air loaded  
D – Dome loaded  
S – Spring loaded

\*Filter not recommended for liquid service.

**WARNING!** Do not attempt to select, install, use or maintain this product until you have read and fully understood the TESCOM Safety, Installation and Operation Precautions.